



On-Line UPS

IDEAL-9200LRB series

6000VA & 10000VA

(Embedded with Isolation Transformer)

IDEAL-9200LRB Series: 6KVA & 10KVA



IDEAL-9200LRB
6KVA/5.4KW & 10KVA/9KW



IDEAL-9200LRB
6KVA/5.4KW & 10KVA/9KW
(Embedded with Isolation Transformer)


Product Introduction

IDEAL-9200LRB series 6KVA to 10KVA is a true double conversion online UPS with **pure sinewave output, zero transfer time** and **enhanced capacity**. With split-type design, it flexibly complies with users' demand no matter for standard or long time operation.

Featuring 6KVA, 10KVA integrated with **LCD display, Power Distribution Unit(PDU)**, **high output power factor 0.9**, outstanding performance, optional isolation transformer box and optional external battery bank.




Basic Functional Module and Power Topology

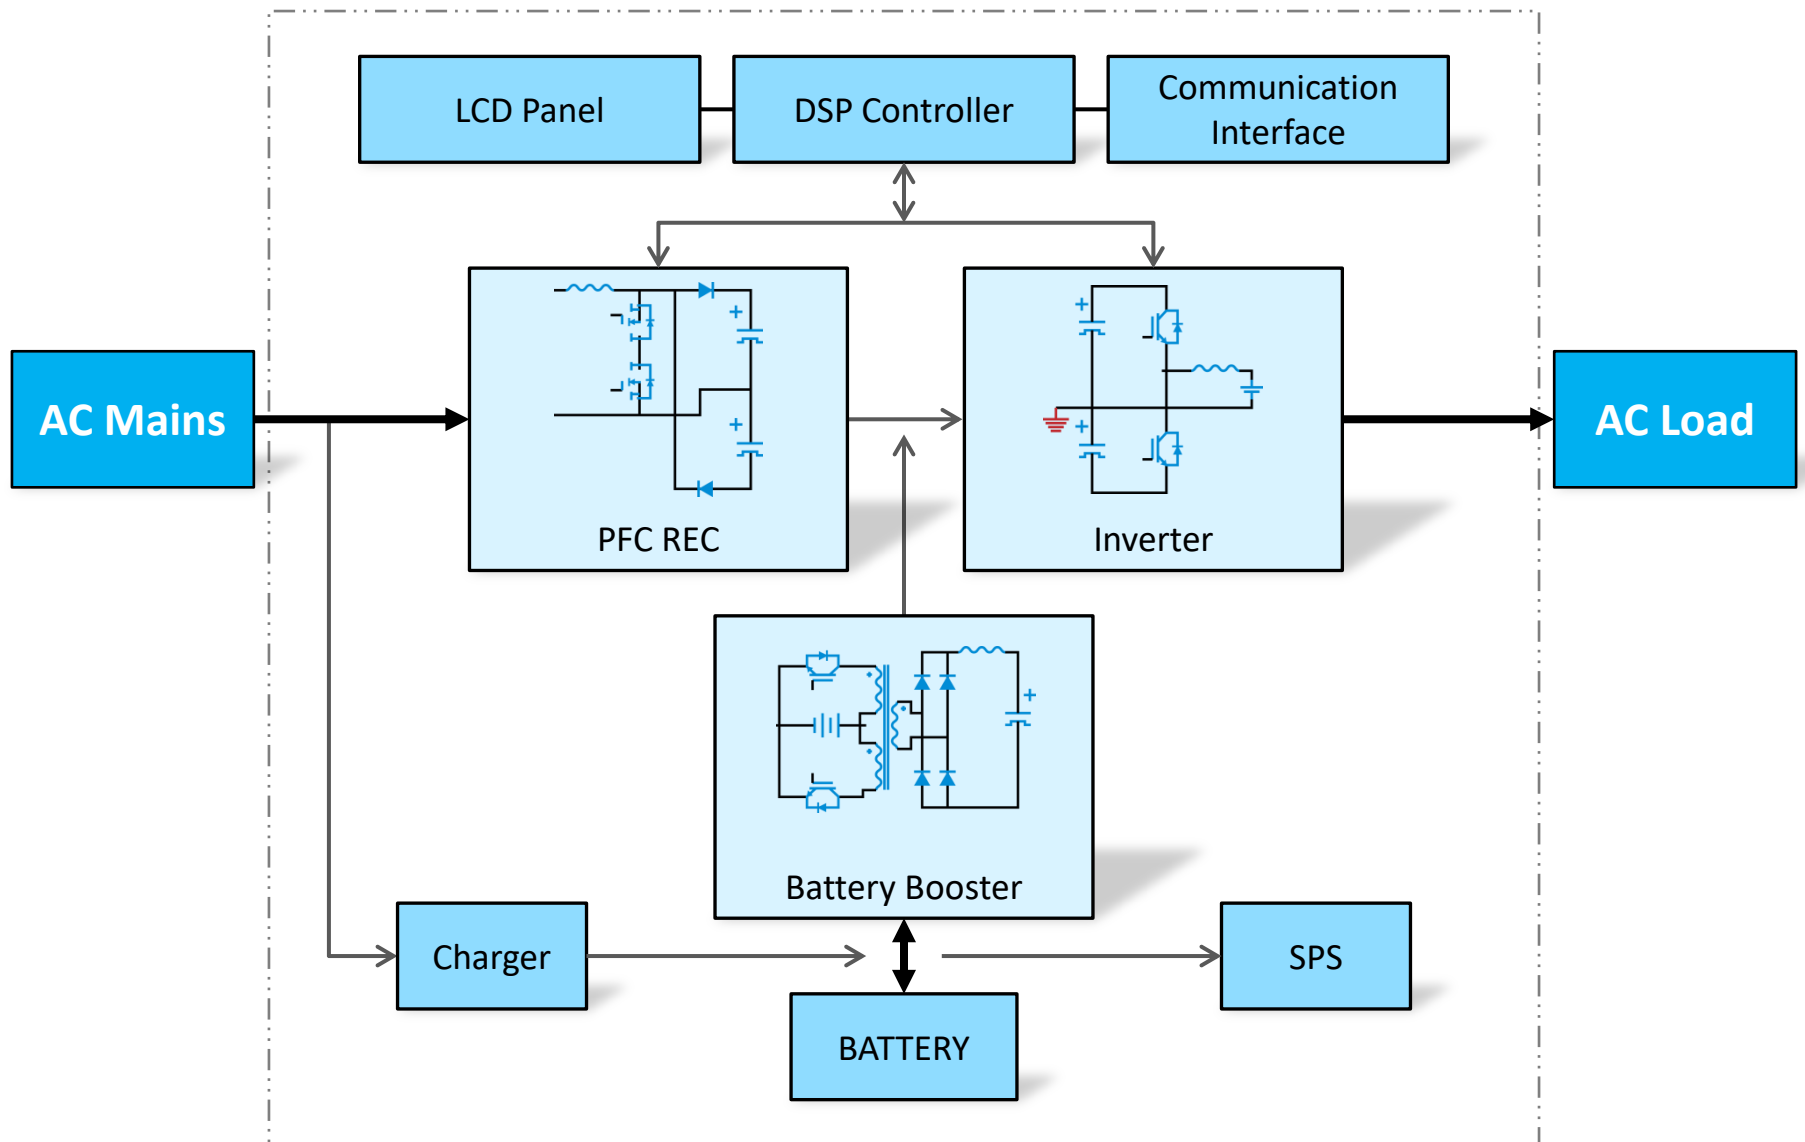

Structural Diagram: IDEAL-9206LRB

Standard Model with PDU Module


Demand Voltage for INPUT: 220/230/240Vac ; **OUTPUT:** 220/230/240Vac

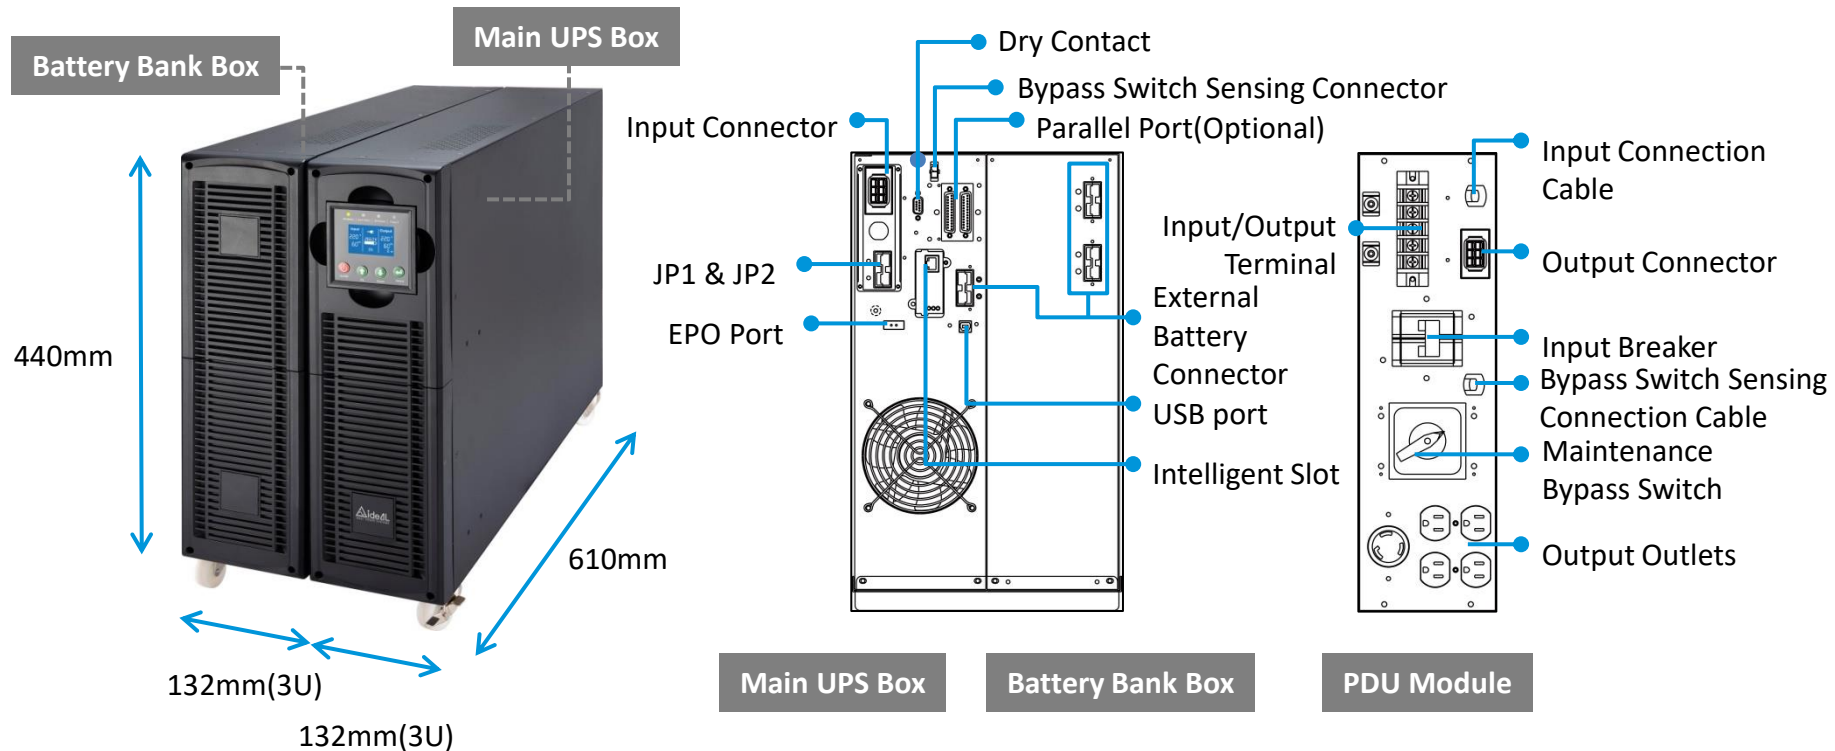

Structural Diagram: IDEAL-9210LRB

Standard Model with PDU Module


Demand Voltage for INPUT: 220/230/240Vac ; **OUTPUT:** 220/230/240Vac

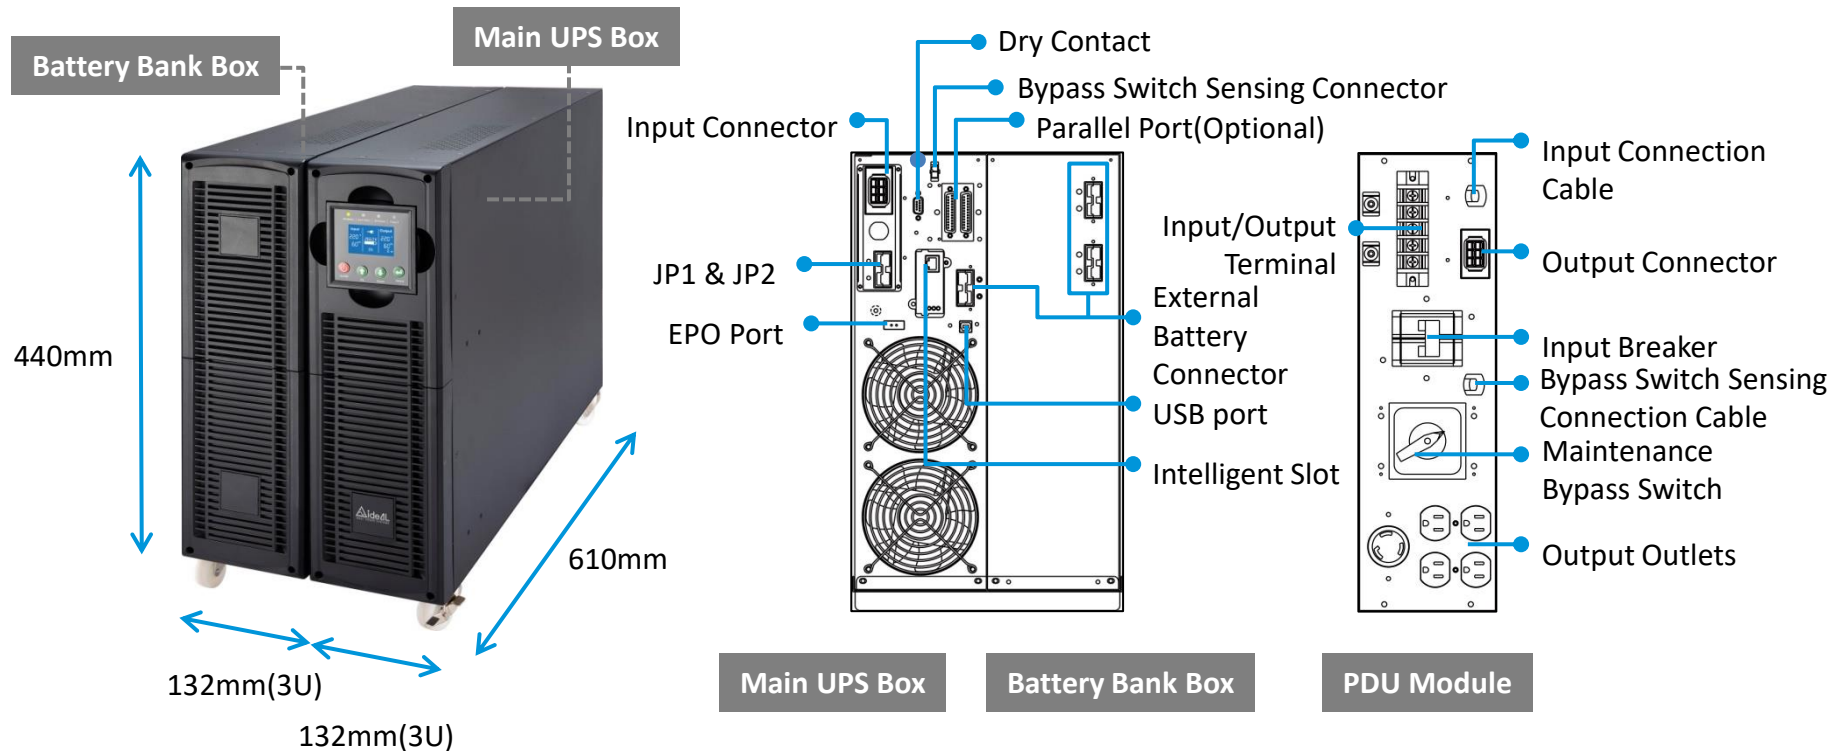

Structural Diagram: IDEAL-9206LRB

Optional Model without PDU Module


Demand Voltage for INPUT: 220/230/240Vac ; **OUTPUT:** 220/230/240Vac

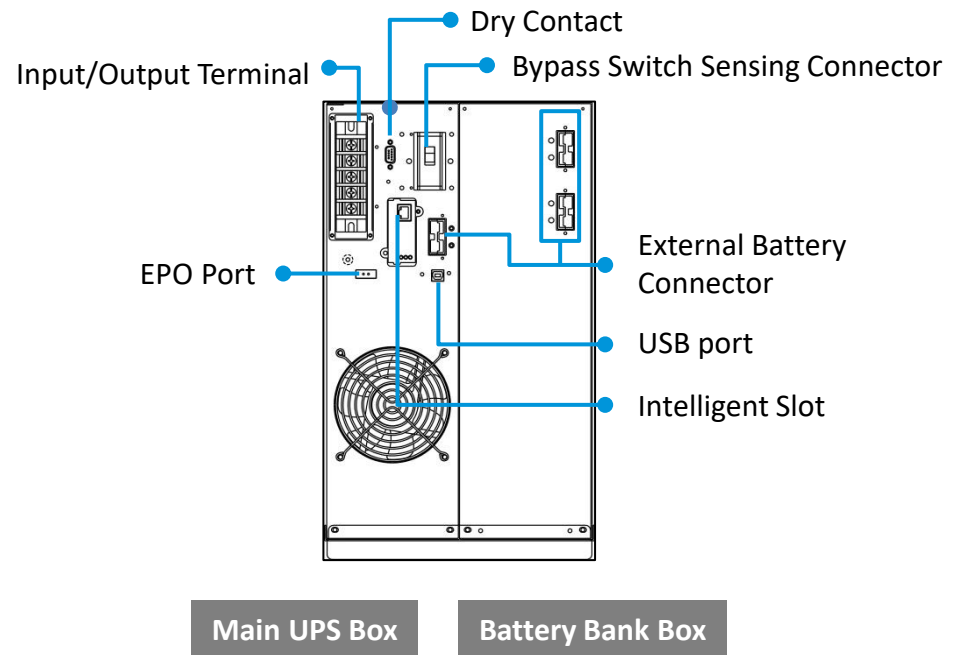

Structural Diagram: IDEAL-9210LRB


Optional Model without PDU Module

Demand Voltage for INPUT: 220/230/240Vac ; **OUTPUT:** 220/230/240Vac

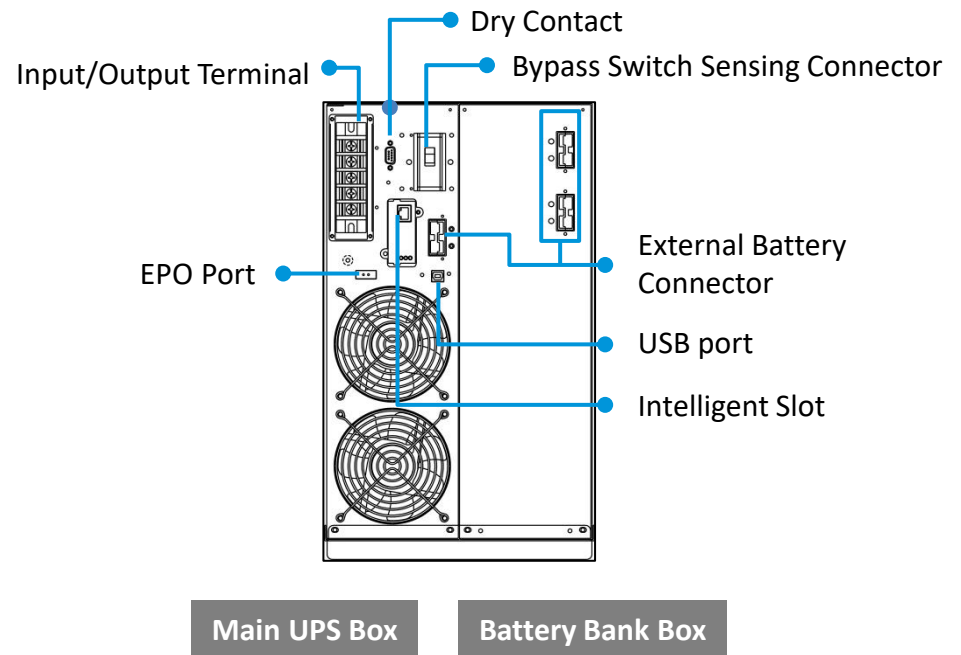


Structural Diagram: IDEAL-9206LRB

Demand Voltage for INPUT: 220/230/240Vac ; **OUTPUT:** 110/220Vac or 115/230Vac or 120/240Vac

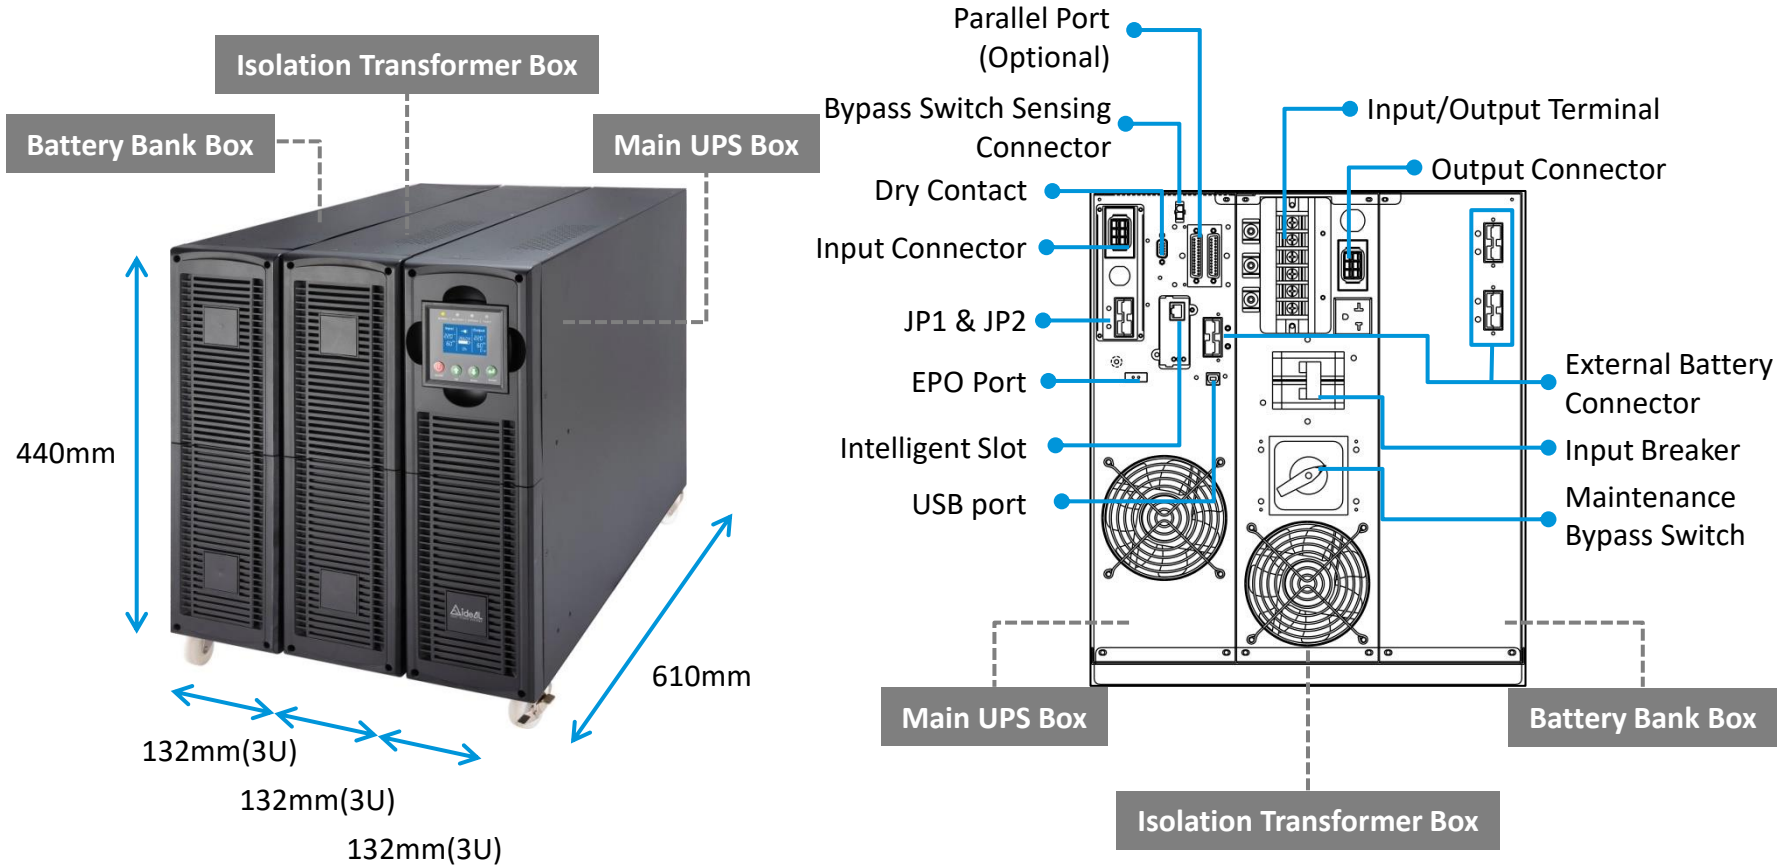

Structural Diagram: IDEAL-9210LRB

Demand Voltage for INPUT: 220/230/240Vac ; **OUTPUT:** 110/220Vac or 115/230Vac or 120/240Vac

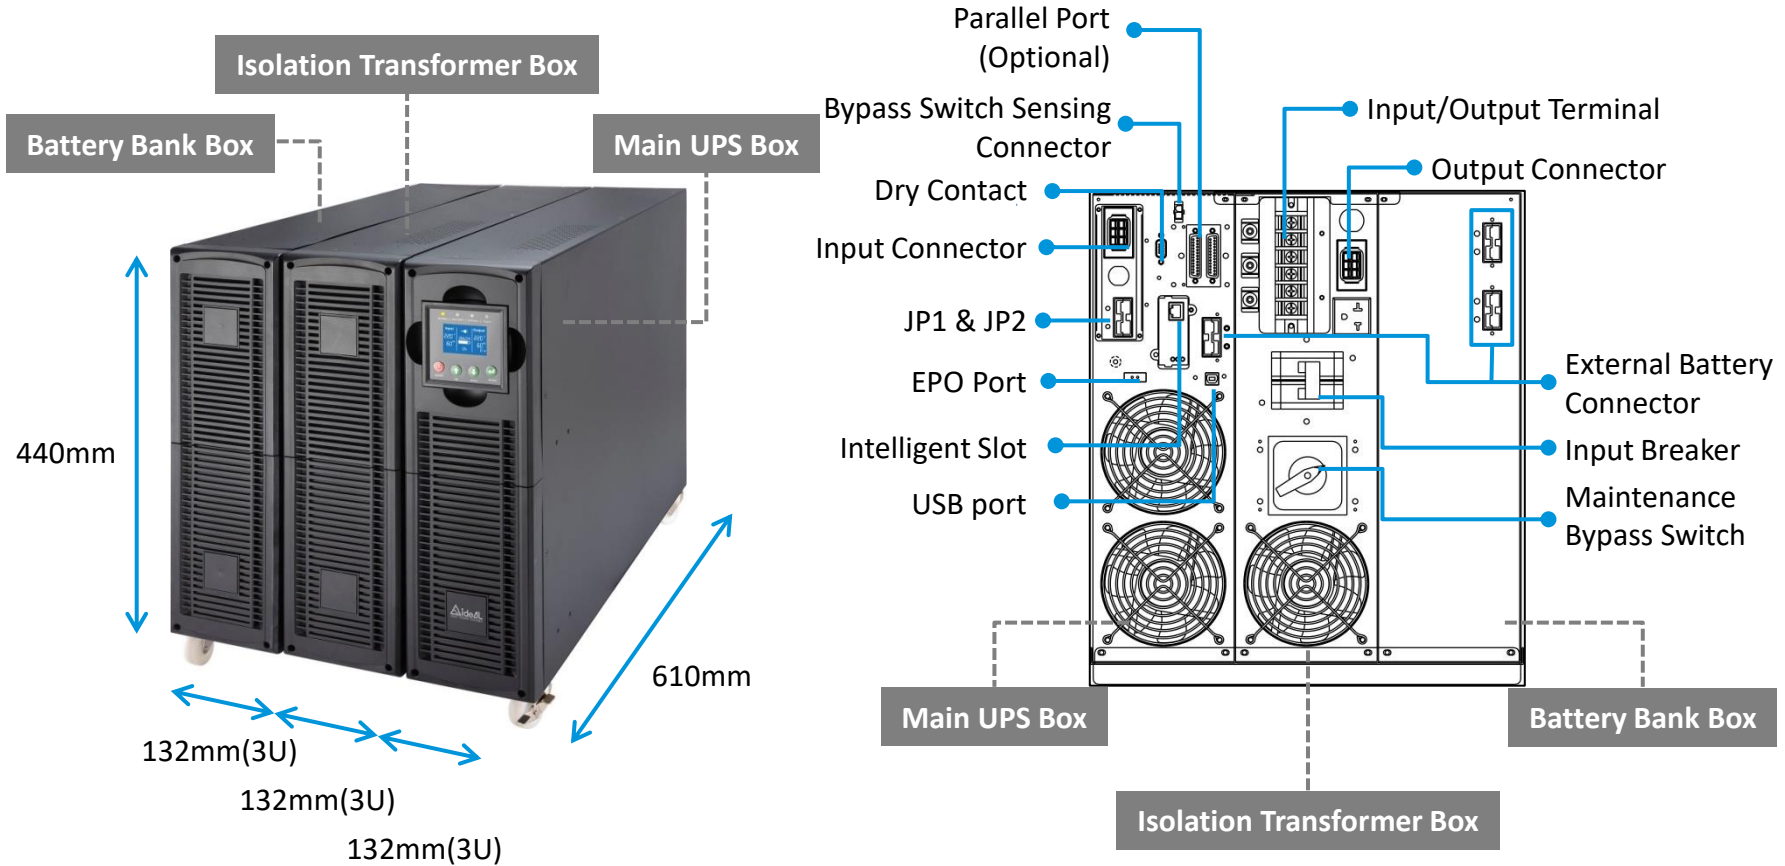

Accessories


Tray Wheels for 6U



Tray Wheels for 9U



Stabilizing Feet

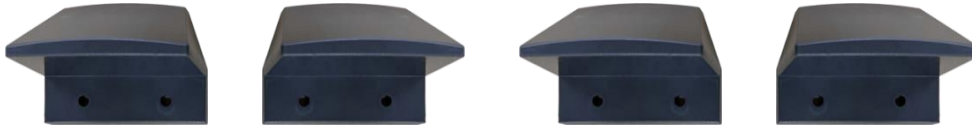

Mounting Bracket




PDU



Tower/Rack Convertible

Rotate the screen 90 degrees

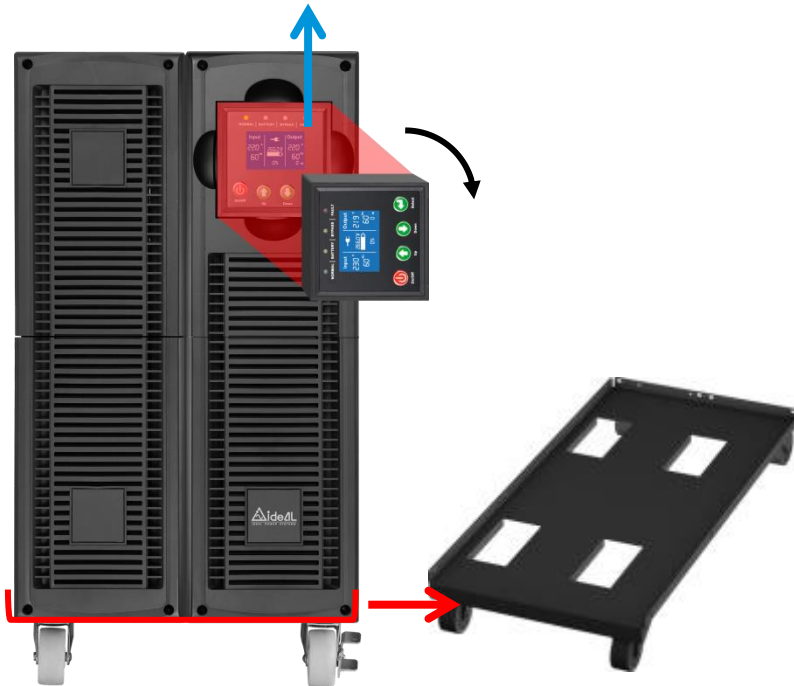

Tower Type

Remove the
Tray Wheels




Rack Type

External Battery Bank




Tower Type

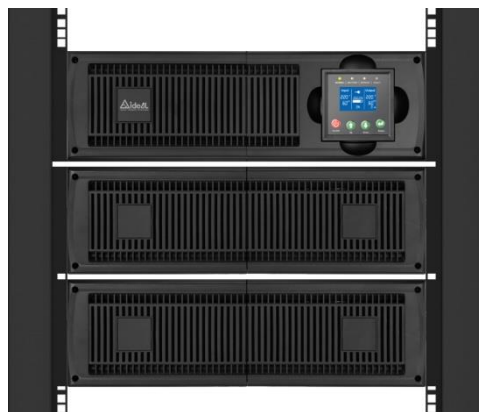

Rack Type

Main UPS Box

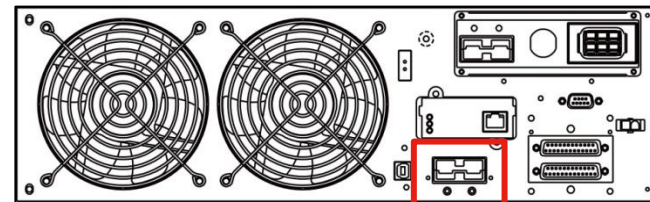

Battery Bank Box-1



Battery Bank Box-2




N>

Control Panel Information

LED Definition :

Normal LED / Battery LED / Bypass LED / Fault LED

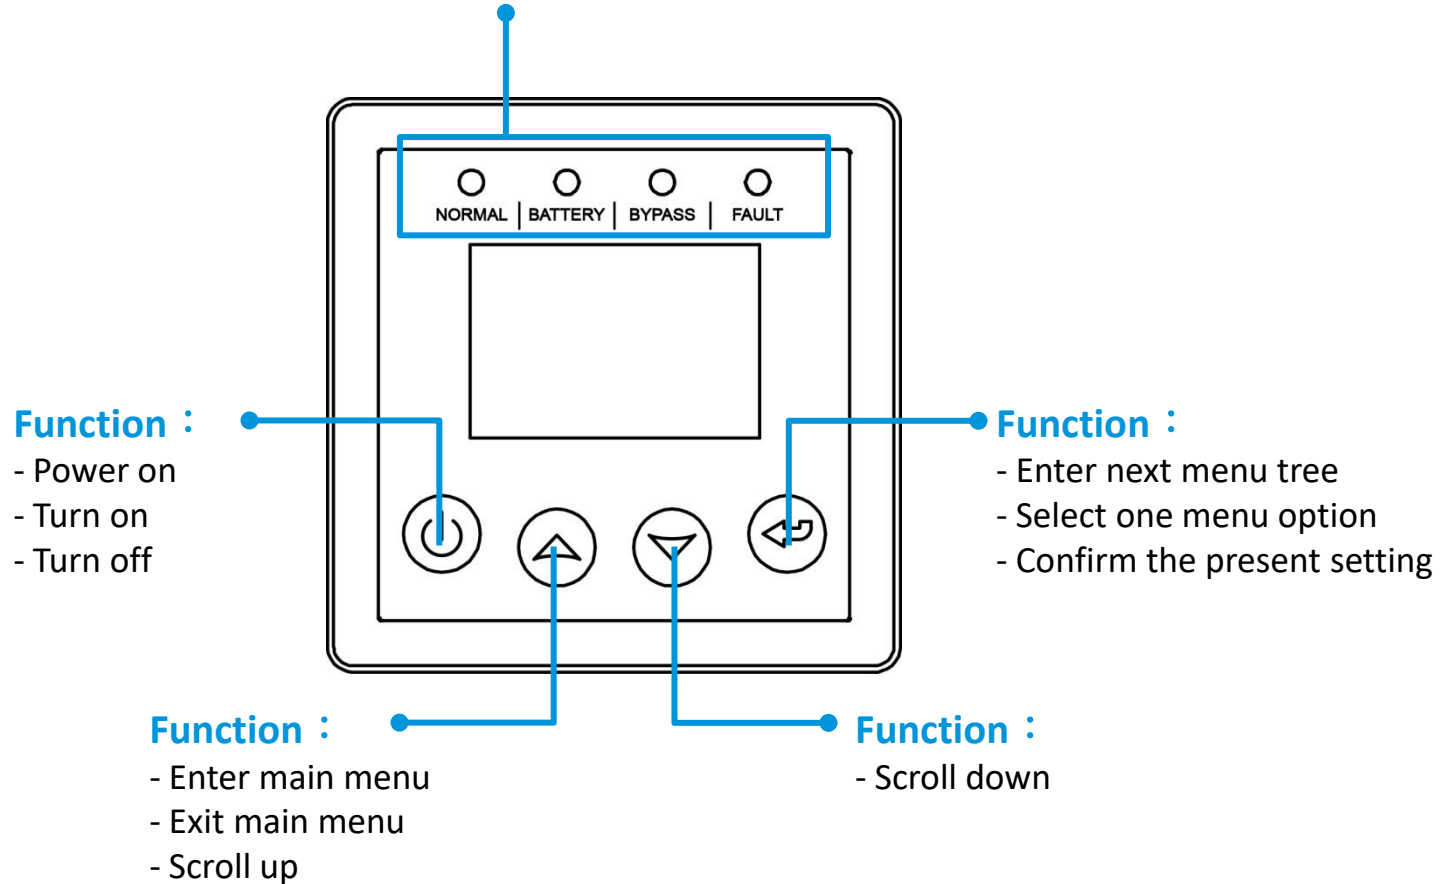


LCD Display

Utility Input Information

UPS Operating Status

UPS Output Information

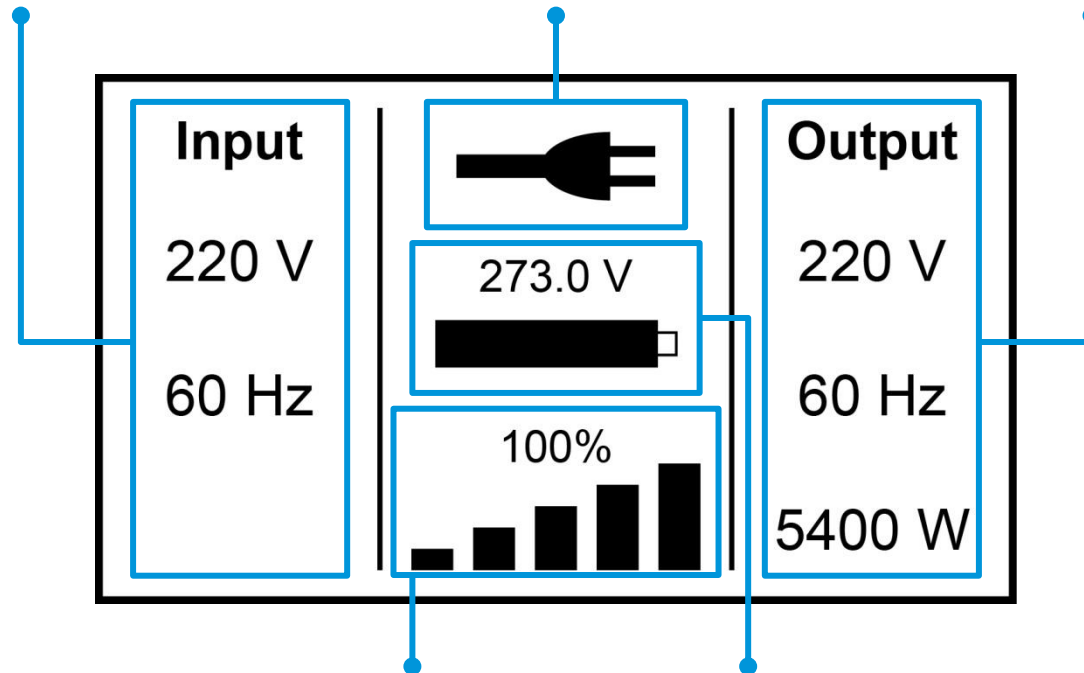

Load Information

Battery Information

Features

-  Isolation transformer in split rack box with maintenance bypass switch (Optional)
-  N+X parallel redundancy and capacity expansion (Optional)
-  High performance true double conversion On Line UPS
-  Microprocessor control guarantees high reliability
-  High efficiency mode (ECO mode)
-  High efficiency mode (Line mode)
-  Rack/tower convertible design
-  Emergency Battery Back-up
-  Output power factor 0.9
-  Pure Sine wave Output
-  Modular design

Specifications -1

*Product specifications are subject to change without further notice.

MODEL	IDEAL-9206LRB	IDEAL-9210LRB
CAPACITY	6KVA/5.4KW	10KVA/9KW
INPUT		
Phase	1 Phase 2 Wires with Ground	
Voltage	220/230/240Vac	
Frequency	50Hz or 60Hz (Auto-sensing)	
THDi	<5% with R full load	
OUTPUT		
Phase	1 Phase 3 Wires with Ground	
Voltage	220/110Vac, 230/115Vac, or 240/120Vac (set via control panel)	
Voltage Regulation	+/-2%	
Frequency (Battery Mode)	50Hz or 60Hz +/-0.05Hz	
Waveform	Pure Sinewave	
THD	<2% (linear load), <5% (non-linear load)	
Crest Ratio	3 : 1	
EFFICIENCY		
To AC Mode	>92% at full load and battery fully charged	
To Battery Mode	>92% at full load and 12VDC/battery	
To ECO Mode	>96% at full load and battery fully charged	

Specifications -2

*Product specifications are subject to change without further notice.

MODEL	IDEAL-9206LRB	IDEAL-9210LRB
BATTERY		
Type	Maintenance free sealed lead-acid battery	
Voltage	240VDC	
Capacity & Number	12V/7AH*20pcs	12V/9AH*20pcs
Recharge Time	7 hours to 90%	8 hours to 90%
TRANSFER TIME		
Line Mode to Battery Mode	0ms	
Inverter to Bypass	0ms	
ECO Mode to Inverter	<10ms	
DISPLAY		
LED Indicator	Normal (Green), Bypass (Yellow), Fault (Red), Battery (Yellow)	
LCD Display	Load level, Battery voltage, Battery mode, AC mode, Bypass mode information	
AUDIBLE ALARM		
Battery Mode	Beeps Every 4 Seconds	
Low Battery	Sounding Every Second	
Overload	Sounding Twice Every Second	
Fault	Beeping Continuously	

Specifications -3

*Product specifications are subject to change without further notice.



MODEL	IDEAL-9206LRB	IDEAL-9210LRB
COMMUNICATIONS		
Interface (Port)	USB Port (Dry Contact is optional)	
Intelligent Slot	Yes, but SNMP card is optional	
EPO	Emergency Power Off	
ENVIRONMENT		
Operating Temperature	0°C-40°C (32°F-104°F)	
Humidity	0-95% (Non-condensing)	
Acoustic Noise	<50dB at 1M	
PHYSICAL		
Format of Main UPS	Tower/Rack: 3U	
Main UPS (D*W*H)	610*440*135mm	
Format of Isolation Box	Tower/Rack: 3U	
Isolation Box (D*W*H)	610*440*135mm	
Format of Battery Box	Tower/Rack: 3U	
Battery Box (D*W*H)	610*440*135mm	

Multiple front panel designs for clients' choice

Main UPS

Battery Box

I-686A

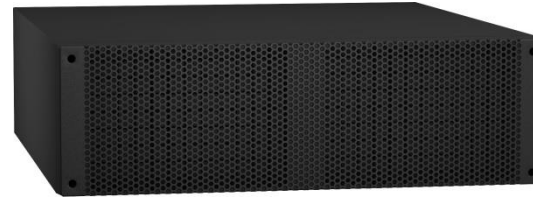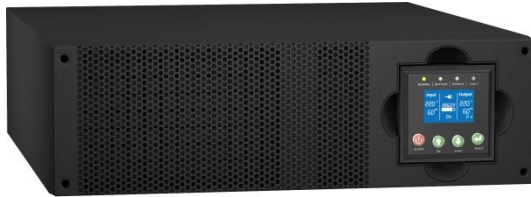

I-686B



I-686C



I-686D



Multiple front panel designs for clients' choice


Main UPS

Battery Box



I-686E



I-686F

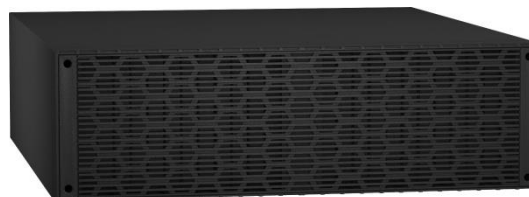

I-686G

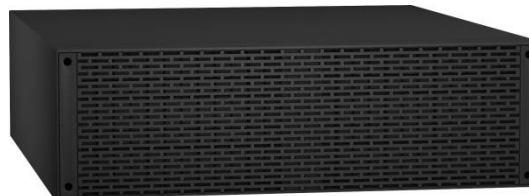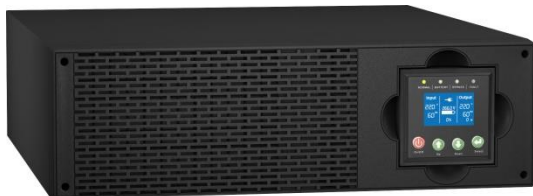


I-686H




Entry-Level PDU (Optional)

PDU740-8N-150

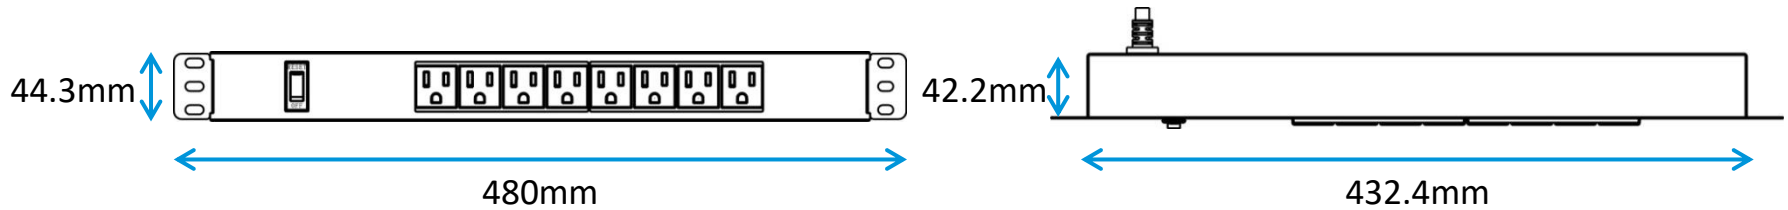

PDU740-12N-150

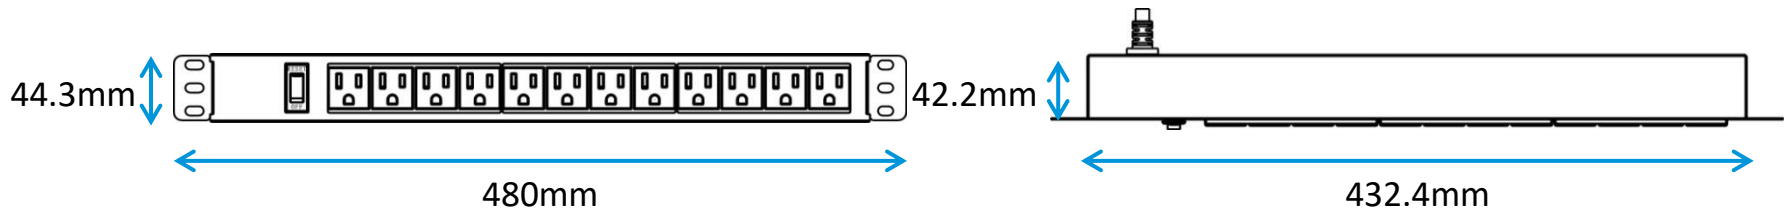




Metered PDU (Optional)

PDU-741M-8N-300

With Cord Retention Tray



Cord Retention Tray

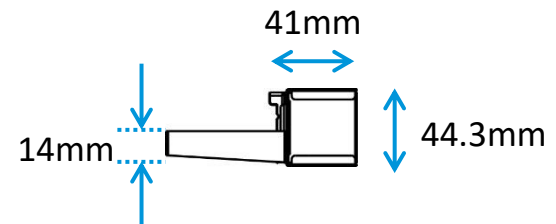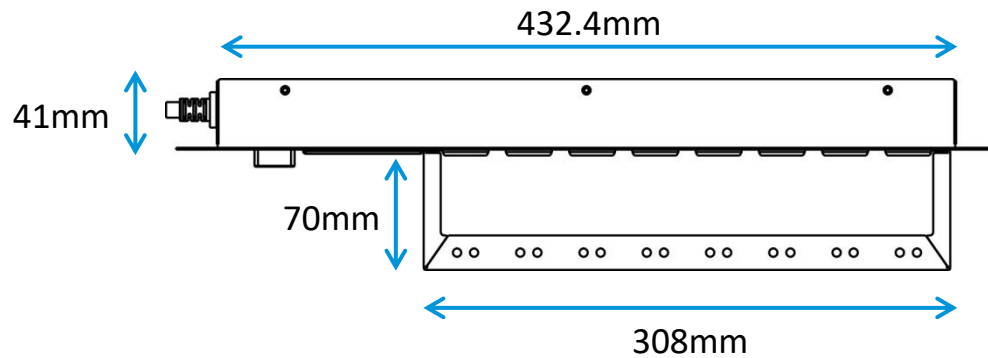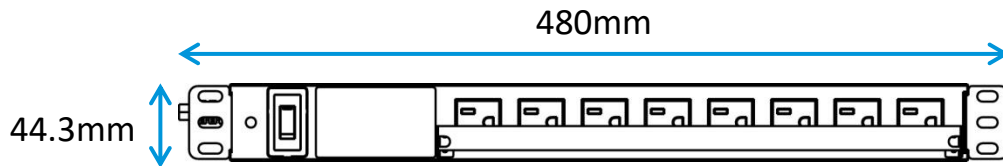



IDEAL UPS FOR IDEAL CHOICE